


MILANO

MOLTO LUCE



ILLUMINI 1

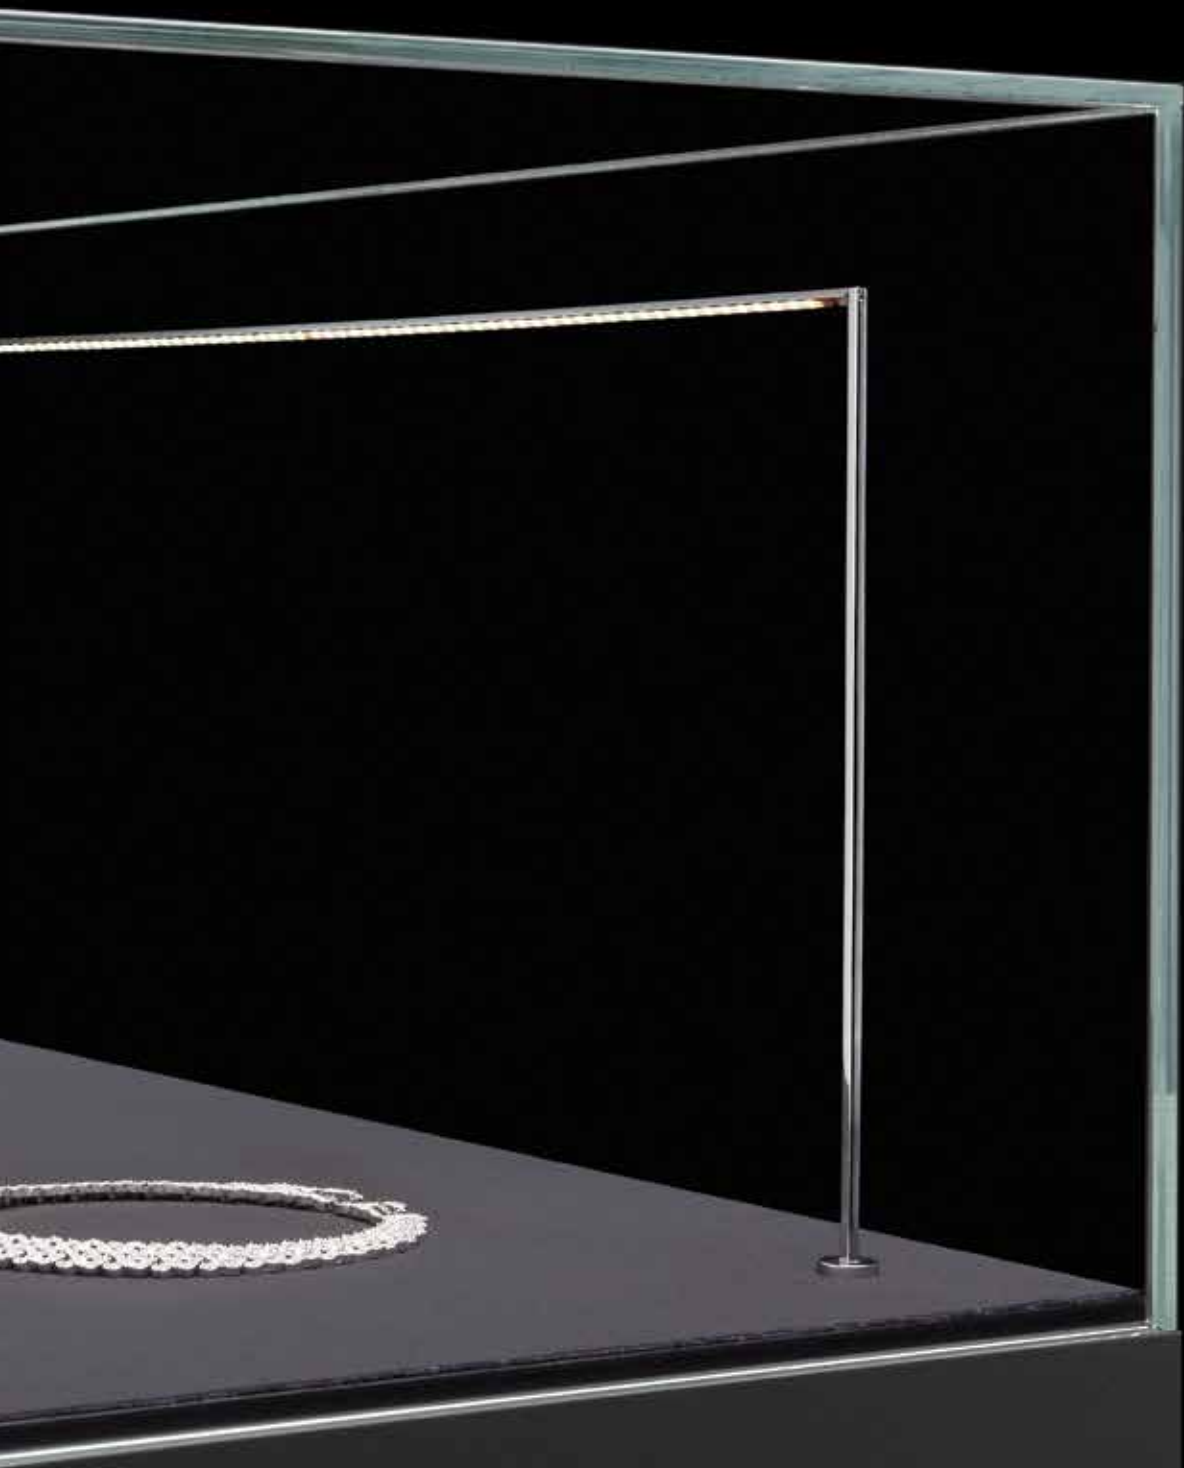



ILLUMINI 1 / 4W


LED

SYS 5W • 100-240V AC • CRI >80 • SDCM 3

595-1081usa	■ W3	chrome	3000K • 240 lm
595-1082usa	■ W3	matte chrome	3000K • 240 lm
595-1086usa	■ W3	black	3000K • 240 lm

595-1101usa	■ W4	chrome	4000K • 250 lm
595-1102usa	■ W4	matte chrome	4000K • 250 lm
595-1106usa	■ W4	black	4000K • 250 lm

595-1121usa	■ W5	chrome	5000K • 260 lm
595-1122usa	■ W5	matte chrome	5000K • 260 lm
595-1126usa	■ W5	black	5000K • 260 lm

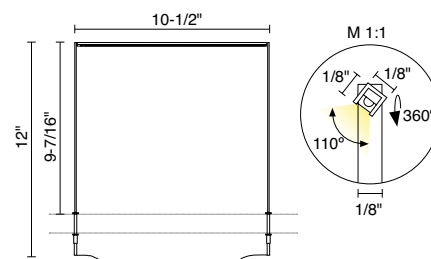

ILLUMINI 1 / 7W



LED

SYS 8W • 100-240V AC • CRI >80 • SDCM 3

595-2081usa	■ W3	chrome	3000K • 480 lm
595-2082usa	■ W3	matte chrome	3000K • 480 lm
595-2086usa	■ W3	black	3000K • 480 lm

595-2101usa	■ W4	chrome	4000K • 510 lm
595-2102usa	■ W4	matte chrome	4000K • 510 lm
595-2106usa	■ W4	black	4000K • 510 lm

595-2121usa	■ W5	chrome	5000K • 520 lm
595-2122usa	■ W5	matte chrome	5000K • 520 lm
595-2126usa	■ W5	black	5000K • 520 lm

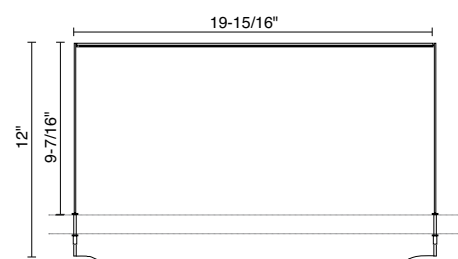

- LED showcase system
- Ultra thin 1/8" profile
- Black, matte chrome or chrome finish
- Almost invisible through very slim vertical holders
- Lighting profile 360° swiveling, 110° beam angle
- 39.37" connection cable included

- Sistema de exhibición de LED
- Perfil ultra fino 1/8"
- Acabados de negro, plata mate, o cromo
- Casi invisible a través de los soportes verticales muy finos
- Perfil de iluminación 360° giratorio, ángulo de 110°
- Un metro de cable de conexión incluido

- Système de vitrine LED
- Profil ultra mince 1/8"
- Fini en noir, chrome mat ou chrome
- Presque invisible grâce aux supports très minces
- Profil orientable à 360°, émission à 110°
- 39.37" de câble de connexion inclus

W3 = LED 3000K
W4 = LED 4000K
W5 = LED 5000K

IP20   

LED PERFORMANCE

LED: Citizen CLL620
SDCM: 3 MacAdam Ellipse
CCT: 3000K, 4000K, or 5000K
CRI: >80, type 83
LIFE: based on IESNA-LM80-2008: 70% of initial lumens after 50,000hrs
Warranty: 5 year warranty

COVER FOR POWER FEED

595-201	■	chrome	set 2 pcs
595-202	■	matte chrome	set 2 pcs
595-206	■	black	set 2 pcs























MOLTO LUCE




ILLUMINI 2 / 4W

LED

SYS 5W • 100-240V AC • CRI >80 • SDCM 3



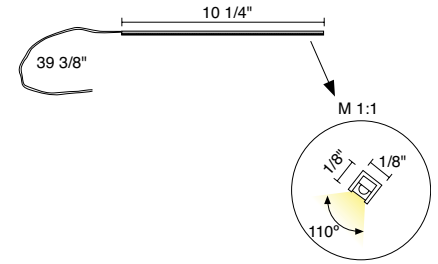















595-3081usa			chrome	3000K • 240 lm
595-3082usa			matte chrome	3000K • 240 lm
595-3086usa			black	3000K • 240 lm
595-3101usa			chrome	4000K • 250 lm
595-3102usa			matte chrome	4000K • 250 lm
595-3106usa			black	4000K • 250 lm
595-3121usa			chrome	5000K • 260 lm
595-3122usa			matte chrome	5000K • 260 lm
595-3126usa			black	5000K • 260 lm




ILLUMINI 2 / 7W

LED

SYS 8W • 100-240V AC • CRI >80 • SDCM 3

595-4081usa			chrome	3000K • 480 lm
595-4082usa			matte chrome	3000K • 480 lm
595-4086usa			black	3000K • 480 lm
595-4101usa			chrome	4000K • 510 lm
595-4102usa			matte chrome	4000K • 510 lm
595-4106usa			black	4000K • 510 lm
595-4121usa			chrome	5000K • 520 lm
595-4122usa			matte chrome	5000K • 520 lm
595-4126usa			black	5000K • 520 lm

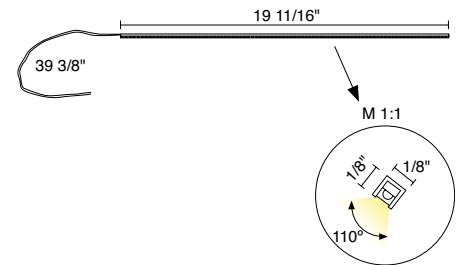

- LED showcase systems
- Ultra thin 1/8" profile
- Black, matte chrome or chrome finish
- Almost invisible through showcase edge mounting
- Holder mounted 360° swiveling, 110° beam angle
- 40" connection cable included

- Sistema de exhibición de LED
- Perfil ultra fino 1/8"
- Acabados de negro, plata mate, o cromo
- Casi invisible a través del mostrador montado en la orilla del marco
- Soporte montado 360° giratoria, ángulo de 110° de luz
- 40" cable de conexión incluido

- Système de vitrine LED
- Profil ultra mince 1/8"
- Fini en noir, chrome mat ou chrome
- Presque invisible grâce au montage dans le coin vitrine
- Monté sur supports, orientable à 360°, émission 110°
- 40" de câble de connection inclus

 = LED 3000K

 = LED 4000K

 = LED 5000K



IP20    


LED PERFORMANCE

LED: Citizen CLL620
SDCM: 3 MacAdam Ellipse
CCT: 3000K, 4000K, or 5000K
CRI: >80, type 83
LIFE: based on IESNA-LM80-2008: 70% of initial lumens after 50,000hrs
Warranty: 5 year warranty

MOUNTING CLIP




self adhesive backside
 LED profile 360° turnable

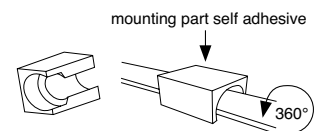
595-101		chrome	set 2 Stk./pcs
595-102		matte chrome	set 2 Stk./pcs



HOLDING CLIP

self adhesive backside
 fixed, 20° angle

595-404		matte chrome	set 2 Stk./pcs
595-405		white	set 2 Stk./pcs
595-406		black	set 2 Stk./pcs

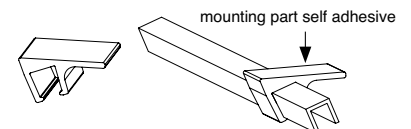



MOLTO LUCE

15774 GATEWAY CIRCLE

TUSTIN, CA 92780

P 714.259.9959

F 714.259.9969

INFO@MOLTOLUCELIGHTING.COM

LEDRAbrands

MOLTOLUCELIGHTING.COM